




HGS (INDIA) LIMITED



26 PIN MALE CONN. ASSY.

SCHEMATIC

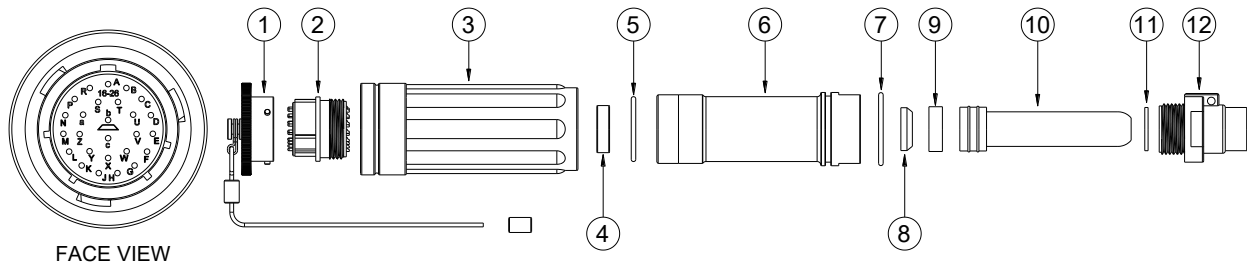

12	BOOT NUT	01 No.
11	BOOT WASHER	01 No.
10	CABLE BOOT	01 No.
9	WASHER COLLET	01 No.
8	COLLET	01 No.
7	O-RING	01 No.
6	CABLE HEAD MAIN BODY	01 No.
5	O-RING	01 No.
4	STRESS WAFER	01 No.
3	COUPLING RING	01 No.
2	26 PIN MALE CONNECTOR INSERT WITH WATER BLOCKING COMPOUND	01 No.
1	DUST CAP WITH WIRE ROPE & FERRULE	01 No.
S. NO.	DESCRIPTION	QTY

158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA

Tel: +91 (0124) 4681800

Email: sales@hgsindia.com




HGS (INDIA) LIMITED



26 PIN FEMALE CONN. ASSY.

SCHEMATIC

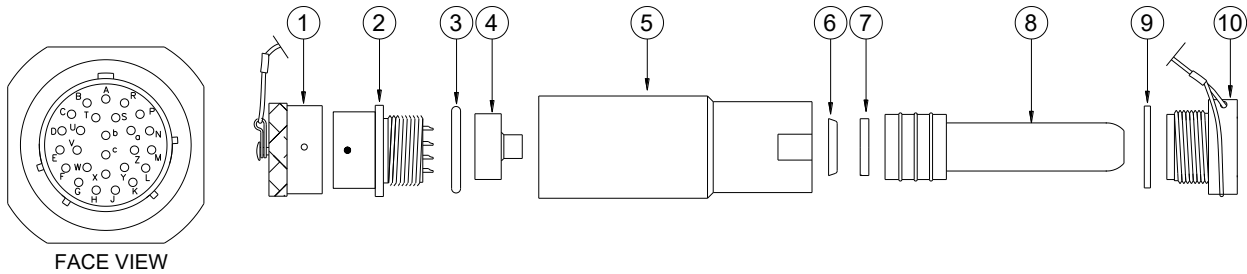

10	BOOT NUT	01 No.
9	BOOT WASHER	01 No.
8	CABLE BOOT	01 No.
7	WASHER COLLET	01 No.
6	COLLET	01 No.
5	CONNECTOR BACK SHELL	01 No.
4	CABLE ANCHOR	01 No.
3	O-RING	01 No.
2	26 PIN FEMALE CONNECTOR INSERT	01 No.
1	DUST CAP WITH WIRE ROPE & FERRULE	01 No.
S. NO.	DESCRIPTION	QTY



HGS (INDIA) LIMITED



Specifications

HGS 26 Pin Male & Female Field Installable Conn. Assy.

- End connector for Shallow Refraction Cables.
- Cable Capacity: 6.5 to 12.5 mm OD.
- Easily field repairable and water proof.
- Cable entry kit prevents rotational twist to conductors inside connector.
- Stress wafer to avoid stress on solder joints.
- Metal body for increased strength and use in rugged field condition.
- Fitted with dust cap.
- Operating Temperature Range: -20°C to +70°C.

Version 1.2