



HGS (INDIA) LIMITED



HGS-5515 Male & Female Screw Fit Connectors






HGS (INDIA) LIMITED



SCHEMATIC

HGS-5515 Male Screw Fit Connectors

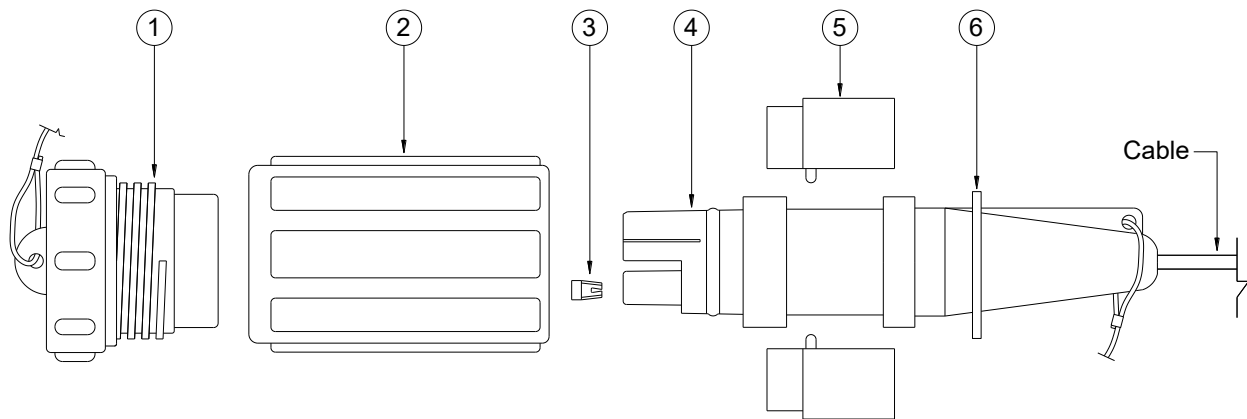

6	CIRCLIP	01 No.
5	STOPPER	02 Nos.
4	CONNECTOR BODY SUB ASSY.	01 No.
3	MILL-MAX #08	01 No.
2	COUPLING RING	01 No.
1	DUST CAP WITH WIRE ROPE & FERRULE	01 No.
S. NO.	DESCRIPTION	QTY

158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA

Tel: +91 (0124) 4681800

Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SPECIFICATIONS

HGS-5515 Male Screw Fit Connectors

- Connector with 1 set of male & female contacts.
- Impact Resistant Material.
- Moulded on 4.57, 5.33 or 6.35 mm cable.
- Male end connector with coupling ring assures mating with its counterpart.
- Water proof for marsh environment.
- Gold plated pins & sockets assure positive electrical connections.
- Screw fit mating.
- Maximum strength in rugged field condition.
- Fitted with dust cap.
- Operating Temperature Range: -20°C to +70°C.
- Pressure Rating: Up to 3 bar.




HGS (INDIA) LIMITED



SCHEMATIC

HGS-5515 Female Screw Fit Connectors

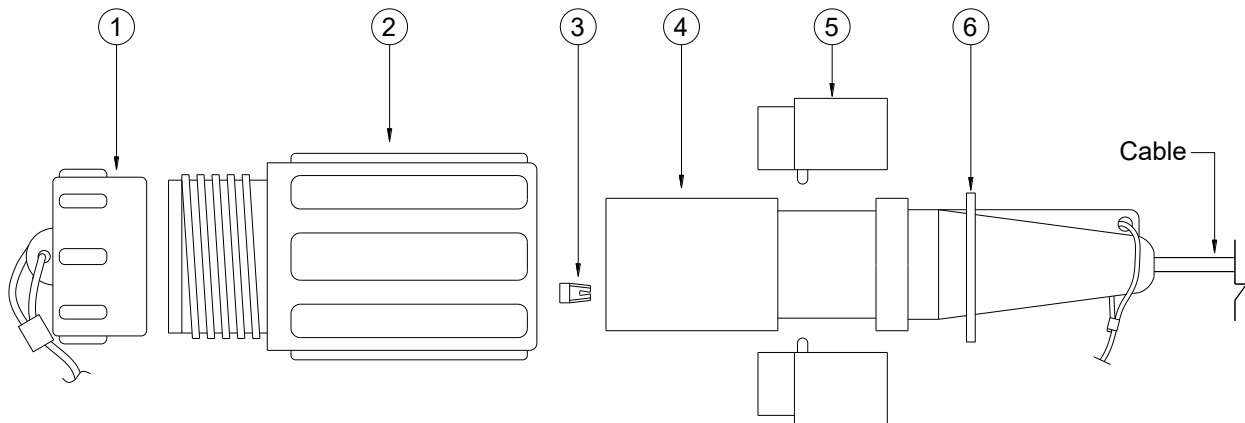

6	CIRCLIP	01 No.
5	STOPPER	02 Nos.
4	CONNECTOR BODY SUB ASSY.	01 No.
3	MILL-MAX #08	01 No.
2	COUPLING RING	01 No.
1	DUST CAP WITH WIRE ROPE & FERRULE	01 No.
S. NO.	DESCRIPTION	QTY

158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA

Tel: +91 (0124) 4681800

Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SPECIFICATIONS

HGS-5515 Female Screw Fit Connectors

- Connector with 1 set of male & female contacts.
- Impact Resistant Material.
- Moulded on 4.57, 5.33 or 6.35 mm cable.
- Female end connector with thread assures mating with its counterpart's coupling ring.
- Water proof for marsh environment.
- Gold plated pins & sockets assure positive electrical connections.
- Screw fit mating.
- Maximum strength in rugged field condition.
- Fitted with dust cap.
- Operating Temperature Range: -20°C to +70°C.
- Pressure Rating: Up to 3 bar.

Version 1.2