



**Applications**

- Fast sample rate systems
- High resolution surveys
- Seismic measurement
- Downhole applications
- Industrial applications

**Features**


- Rugged design with rotating-coil contacts
- High spurious frequency over 500 Hz
- Large bandwidth
- Omni-directional
- Up to 1ms data sampling

**Specifications**


Frequency [Hz]	30 ±5%	Typical spurious frequency [Hz]	> 500
O.C. Damping	0.550 ±5%	Maximum tilt angle [°]	360
O.C. Sensitivity [V/m/s]	30 ±5%	Dimensions [mm]	∅26.7 x 32
Resistance [Ω]	360 ±5%	Weight [g]	83
Moving mass [g]	9.2	Operating temperature [°C]	-40 to 100
Max coil excursion p.p. [mm]	2	Warranty <sup>1</sup>	2 years
Shunt for 0.7 damping [Ω]	1300	Distortion with 17.78 mm/s p.p. coil-to-case velocity at 30 Hz	≤ 0.2%

All parameters are specified at +20°C in the working position unless stated otherwise  
<sup>1</sup> Warranty excludes damage caused by high voltage and physical damage to the element case

**Response**

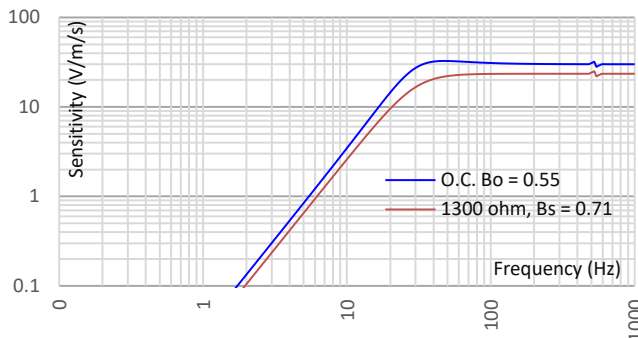

**Phase**

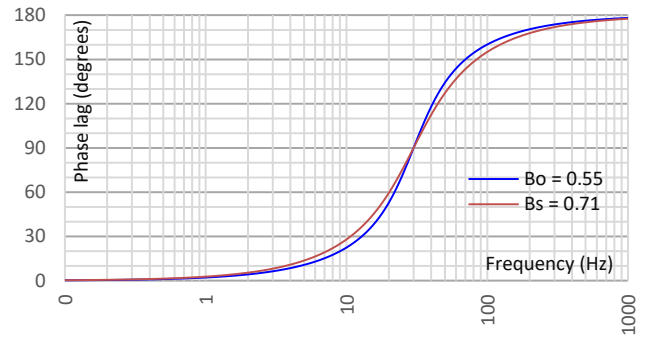


**Ordering information**

Part	Description	Working position	Polarity
SG000103	HG-11 U 30 Hz 360 ohm	Vertical (pins up)	Tap on the pins gives positive signal
SG000096	HG-11 H 30 Hz 360 ohm	Horizontal	Tap on the bottom gives positive signal
SG000146	HG-11 S 30 Hz 360 ohm	Standard vertical (pins down)	Tap on the bottom gives positive signal

**Contact**

**India**  
 HGS (India) Ltd  
 Tel : +91-11-46066604  
[www.hgsindia.com](http://www.hgsindia.com)



**The Netherlands**  
 HGS Products B.V.  
 Tel : +31 708200820  
[www.hgsproducts.nl](http://www.hgsproducts.nl)

