



HGS (INDIA) LIMITED



HG-25 Miniature Omni-Directional Geophone



Based on the technology transfer for manufacturing the SM® range of geophones from Sensor® Nederland BV, HGS (India) Limited (erstwhile Geosource India Limited) offers the HG-25 miniature, omni-directional, 15 Hz, 2400 ohm geophone.

Applications: Multi-component, high resolution, seismic monitoring and recording.

Features:

- Miniature design, much smaller than a standard geophone
- High sensitivity (52 V/m/s)
- Omni-directional geophone design gives accurate vector response

Specifications - HG-25 M OD 15 Hz 2400 ohm

Optimum Orientation Horizontal
 Operational Range 360° (Omni)

Frequency Value
 Natural frequency 15 Hz
 Tolerance (Optimum Orientation) ± 5%
 Tolerance (Operational Range) - 5% to + 15%

Typical spurious frequency ≥160 Hz

Distortion

Optimum Orientation < 0.2%
 Operational Range < 0.7%
 Distortion measurement frequency 15 Hz
 P.P. coil to case velocity for distortion 17.78 mm/s

Damping

Open circuit 0.57
 Tolerance (Optimum Orientation) ± 15%
 Tolerance (Operational Range) - 20% to + 10%

Sensitivity

Sensitivity 52 V/m/s
 Tolerance (Optimum Orientation) ± 5%
 Tolerance (Operational Range) - 15% to + 5%
 Moving mass 7.3 g
 Maximum coil excursion p.p . 3 mm

Coil Resistance

Standard 2400 Ω
 Tolerance ± 5%

Physical Characteristics


Diameter 22.2 + 0 / - 0.1 mm
 Height 27.9 ± 0.2 mm
 Weight 48 g
 Operating temperature range - 40°C to + 100°C

Warranty Period* 1 year

*Warranty excludes damage caused by high voltage and physical damage to the element case.

All parameters are specified at +20°C.

Response curve

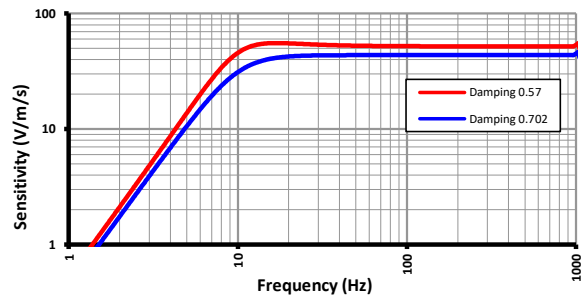

Version 1.0

Ordering information

Description	Part No.	Work direction
HG-25 M OD 15 Hz 2400 ohm	SG000580	Omni
India HGS (India) Ltd Tel : +91-11-46066604 Website : www.hgsindia.com		The Netherlands HGS Products B.V. Tel : +31 708200820 Website : www.hgsproducts.nl