



Applications

- Seismic measurement
- Refraction seismic
- Gimbal applications

Features


- Rugged design with rotating-coil contacts
- High tilt tolerance

Specifications


Frequency [Hz]	14 ±5%	Typical spurious frequency [Hz]	> 190
O.C. Damping	0.180 ±5%	Maximum tilt angle frequency vert. / horz. [°]	25 / 0
O.C. Sensitivity [V/m/s]	28.8 ±5%	Maximum tilt angle distortion vert. / horz. [°]	20 / 0
Resistance [Ω]	375 ±5%	Dimensions [mm]	∅25.4 x 32
Moving mass [g]	11.0	Weight [g]	74
Max coil excursion p.p. [mm]	2	Operating temperature [°C]	-40 to 100
Shunt for 0.7 damping [Ω]	430	Warranty ¹	3 years
Distortion with 17.78 mm/s p.p. coil-to-case velocity at 14 Hz			≤ 0.2%

All parameters are specified at +20°C in the working position unless stated otherwise
¹ Warranty excludes damage caused by high voltage and physical damage to the element case

Response

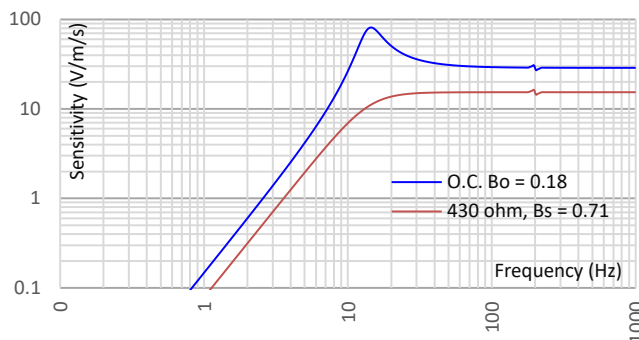

Phase

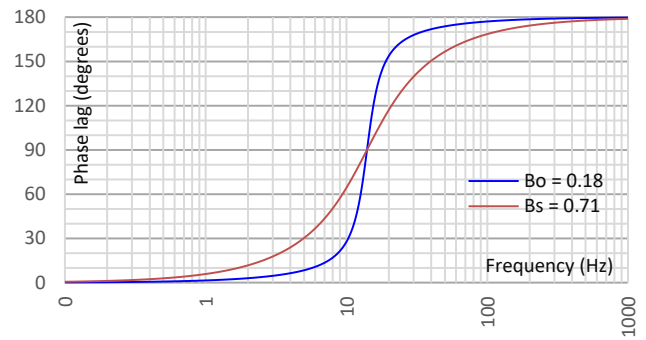


Ordering information

Part	Description	Working position	Polarity
SG000108	HG-4 U 14 Hz 375 ohm	Vertical (pins up)	Tap on the pins gives positive signal
SG000128	HG-4 H 14 Hz 375 ohm	Horizontal	Tap on the bottom gives positive signal
SG000127	HG-4 S 14 Hz 375 ohm	Standard vertical (pins down)	Tap on the bottom gives positive signal

Contact

India
 HGS (India) Ltd
 Tel : +91-11-46066604
www.hgsindia.com



The Netherlands
 HGS Products B.V.
 Tel : +31 708200820
www.hgsproducts.nl

