



Applications

- Land nodal systems
- Earthquake monitoring

Features


- Rugged design with rotating-coil contacts
- Low natural frequency
- Ultra high sensitivity

Specifications


Frequency [Hz]	4.5 ±0.5Hz	Typical spurious frequency [Hz]	> 140
O.C. Damping	0.650 ±5%	Maximum tilt angle vertical / horizontal [°]	10 / 0
O.C. Sensitivity [V/m/s]	204 ±5%	Dimensions [mm]	∅26.7 x 39.3
Resistance [Ω]	11500 ±5%	Weight [g]	105
Moving mass [g]	13.5	Operating temperature [°C]	-40 to 100
Max coil excursion p.p. [mm]	3	Warranty ¹	1 year
Requird system input impedance	1M		
Distortion with 17.78 mm/s p.p. coil-to-case velocity at 12 Hz			≤ 0.15%

All parameters are specified at +20°C in the working position unless stated otherwise
¹ Warranty excludes damage caused by high voltage and physical damage to the element case

Response

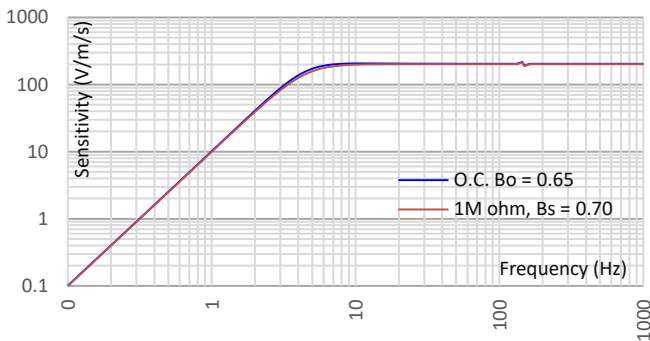

Phase

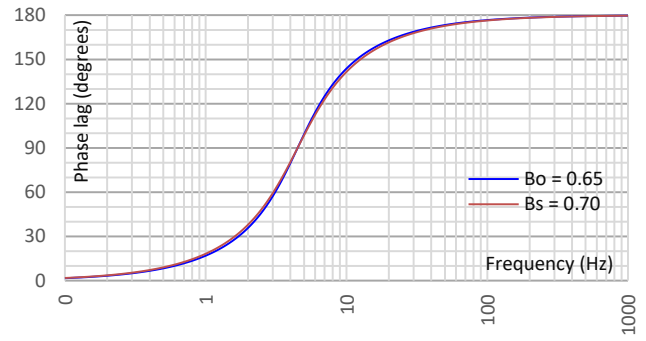


Ordering information

Part	Description	Working position	Polarity
SG000607	HG-5UHS U 4.5 Hz 11500 ohm	Vertical (pins up)	Tap on the pins gives positive signal
SG000618	HG-5UHS H 4.5 Hz 11500 ohm	Horizontal	Tap on the bottom gives positive signal

Contact

India
 HGS (India) Ltd
 Tel : +91-11-46066604
www.hgsindia.com



The Netherlands
 HGS Products B.V.
 Tel : +31 708200820
www.hgsproducts.nl

