



**Applications**

- Critical turbo machinery
- High temperature environment
- Absolute vibration measurements

**Features**


- Rugged design with rotating-coil contacts
- 4mm peak to peak coil excursion
- High temperature

**Specifications**


Frequency [Hz]	10 ±5%	Typical spurious frequency [Hz]	> 180
O.C. Damping	0.326 ±10%		
O.C. Sensitivity [V/m/s]	42.8 ±2.5%		
Resistance [Ω]	900 ±5%	Dimensions [mm]	∅25.4 x 36
Moving mass [g]	10.5	Weight [g]	90
Max coil excursion p.p. [mm]	4	Operating temperature [°C]	-40 to 200
Shunt for 0.7 damping [Ω]	2800	Warranty <sup>1</sup>	3 months
Distortion with 17.78 mm/s p.p. coil-to-case velocity at 12 Hz			≤ 0.5%

All parameters are specified at +20°C in the working position unless stated otherwise  
<sup>1</sup> Warranty excludes damage caused by high voltage and physical damage to the element case

**Response**

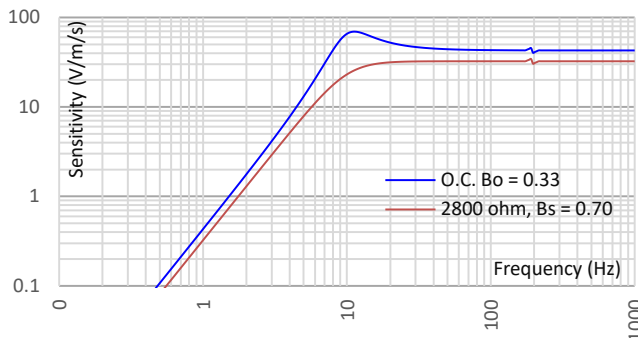

**Phase**

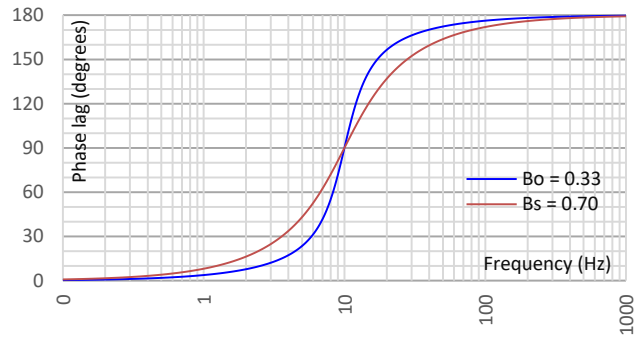


**Ordering information**

Part	Description	Working position	Polarity
SG000161	HG-6 UB 10 Hz 900 ohm HT	Vertical (pins up)	Tap on the pins gives positive signal
SG000162	HG-6 HB 10 Hz 900 ohm HT	Horizontal	Tap on the bottom gives positive signal
SG000160	HG-6 SB 10 Hz 900 ohm HT	Standard vertical (pins down)	Tap on the bottom gives positive signal

**Contact**

**India**  
 HGS (India) Ltd  
 Tel : +91-11-46066604  
[www.hgsindia.com](http://www.hgsindia.com)



**The Netherlands**  
 HGS Products B.V.  
 Tel : +31 708200820  
[www.hgsproducts.nl](http://www.hgsproducts.nl)

