

**Applications**

- Blasting monitoring
- Strong-motion surveys

**Features**


- Rugged design with rotating-coil contacts
- 4mm peak to peak coil excursion
- High tilt tolerance

**Specifications**


Frequency [Hz]	8 ±6.3%	Maximum tilt angle [°]	20
O.C. Damping	0.315 ±5%	Typical spurious frequency [Hz]	150
O.C. Sensitivity [V/m/s]	28.8 ±5%	Dimensions [mm]	∅25.4 x 36
Resistance [Ω]	375 ±5%	Weight [g]	81
Moving mass [g]	11.1	Operating temperature [°C]	-40 to 100
Maximum coil excursion p.p. [mm]	4	Warranty <sup>1</sup>	2 year
Shunt for 0.7 damping [Ω]	1600	Distortion with 17.78 mm/s p.p. coil-to-case velocity at 12 Hz	≤ 0.2%

All parameters are specified at +20°C in the working position unless stated otherwise  
<sup>1</sup> Warranty excludes damage caused by high voltage and physical damage to the element case

**Response**

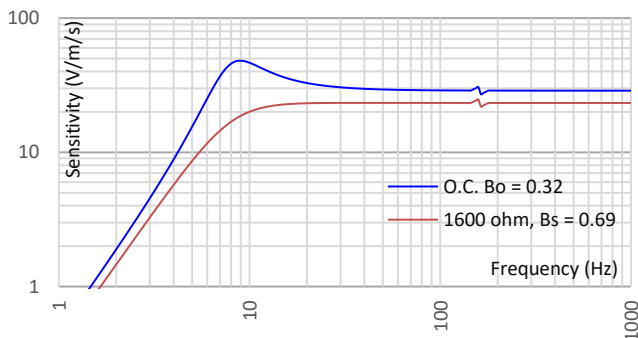

**Phase**

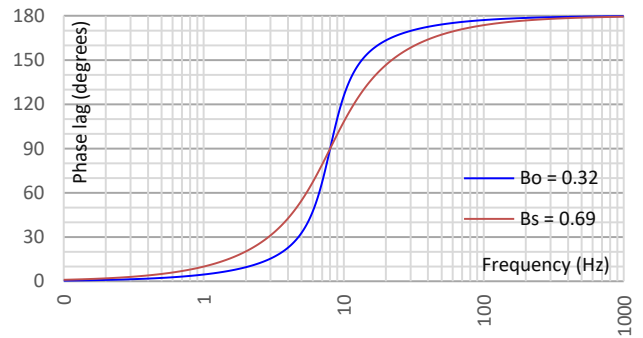


**Ordering information**

Part	Description	Working position	Polarity
SG000136	HG-6 UB 8 Hz 375 ohm	Vertical (pins up)	Tap on the pins gives positive signal
SG000138	HG-6 HB 8 Hz 375 ohm	Horizontal	Tap on the bottom gives positive signal
SG000137	HG-6 SB 8 Hz 375 ohm	Standard vertical (pins down)	Tap on the bottom gives positive signal

**Contact**

**India**  
 HGS (India) Ltd  
 Tel : +91-11-46066604  
[www.hgsindia.com](http://www.hgsindia.com)



**The Netherlands**  
 HGS Products B.V.  
 Tel : +31 708200820  
[www.hgsproducts.nl](http://www.hgsproducts.nl)

