

Applications

- Blasting monitoring
- Strong-motion surveys

Features


- Rugged design with rotating-coil contacts
- 4mm peak to peak coil excursion
- High tilt tolerance

Specifications


Frequency [Hz]	8 ±6.3%	Typical spurious frequency [Hz]	> 150
O.C. Damping	0.315 ±5%	Maximum tilt angle frequency vert. / horz. [°]	20 / 0
O.C. Sensitivity [V/m/s]	28.8 ±5%	Maximum tilt angle distortion vert. / horz. [°]	15 / 0
Resistance [Ω]	375 ±5%	Dimensions [mm]	∅25.4 x 36
Moving mass [g]	11.1	Weight [g]	81
Max coil excursion p.p. [mm]	4	Operating temperature [°C]	-40 to 100
Shunt for 0.7 damping [Ω]	1600	Warranty ¹	2 year
Distortion with 17.78 mm/s p.p. coil-to-case velocity at 12 Hz			≤ 0.2%

All parameters are specified at +20°C in the working position unless stated otherwise
¹ Warranty excludes damage caused by high voltage and physical damage to the element case

Response

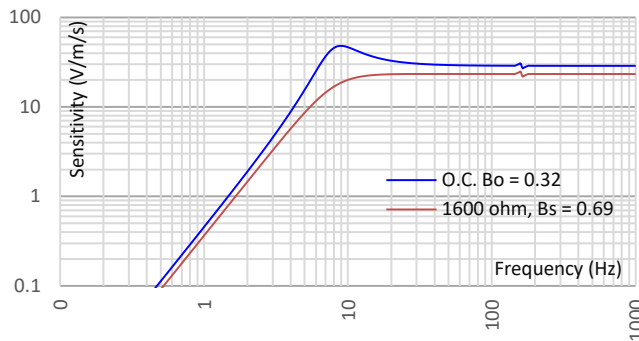

Phase

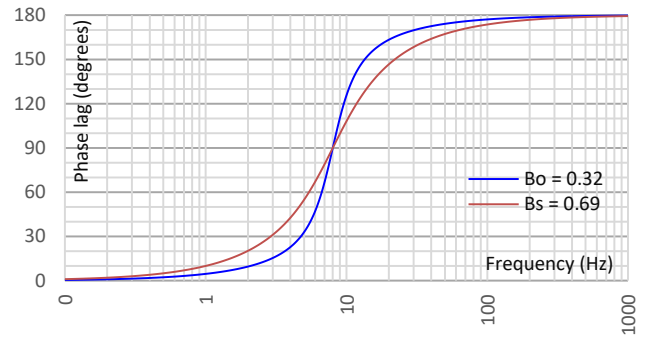


Ordering information

Part	Description	Working position	Polarity
SG000136	HG-6 UB 8 Hz 375 ohm	Vertical (pins up)	Tap on the pins gives positive signal
SG000138	HG-6 HB 8 Hz 375 ohm	Horizontal	Tap on the bottom gives positive signal
SG000137	HG-6 SB 8 Hz 375 ohm	Standard vertical (pins down)	Tap on the bottom gives positive signal

Contact

India
 HGS (India) Ltd
 Tel : +91-11-46066604
www.hgsindia.com



The Netherlands
 HGS Products B.V.
 Tel : +31 708200820
www.hgsproducts.nl

