



HGS (INDIA) LIMITED



HG-6 LF OB Omni Directional Geophone



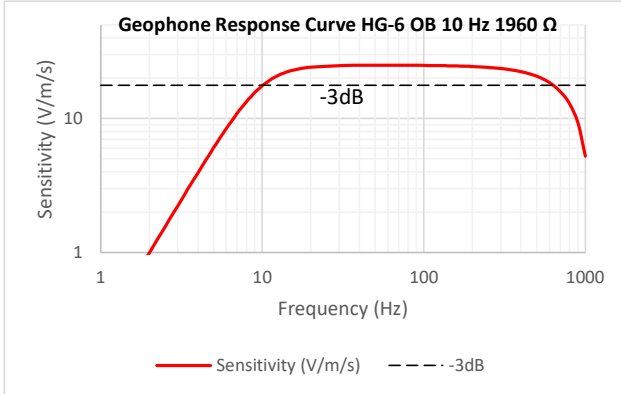
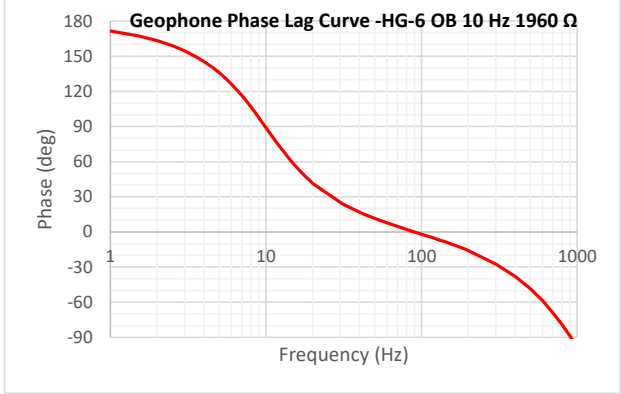
Based on the technology transfer for manufacturing the SM[®] range of geophones from Sensor[®] Nederland BV, HGS (India) Limited (erstwhile Geosource India Limited) offers the HG-6 geophone fully omni-directional at 10Hz natural frequency for low frequency applications where the geophone orientation cannot be controlled . The low frequency response is attained by the addition of a resistor - capacitor (RC) network.

Applications: Low frequency, Ocean Bottom Node (OBN) and VSP applications.

Features:

- Low frequency Omni Directional
- Distortion $\leq 0.9\%$
- Rugged design with rotating-coil contacts

Specifications - HG-6 LF OB 10Hz 1960 Ohm

	Implicit parameters	Explicit parameters	
	Value	Value	
Natural frequency	10 Hz	14 Hz	
Tolerance	± 20%	± 7%	
Maximum tilt angle for	360°	360°	
Distortion	≤0.9%	≤0.4%	
Damping	0.7	0.185	
Tolerance	± 20%	+10%,-5%	
Sensitivity	24.5 V/m/s	80 V/m/s	
Tolerance	± 20%	+5%,-10%	
Moving mass	8.7 g	10.2 g	
Max coil excursion p.p .	0.5 mm	0.5 mm	
Coil Resistance	1960 Ω	3500 Ω	
Tolerance	± 10%	± 5%	
Physical Characteristics			
Diameter	25.4 mm	25.4 mm	
Height	40.5 mm	36 mm	
Weight	81 g		
Operating temperature range	-40°C to 70°C		
Warranty Period*	1 year		
*Warranty excludes damage caused by high voltage and physical damage to the element case.			
All parameters are specified at +20°C.			

Ordering information

Description	Part No.	Work direction
HG-6 LF OB 10 Hz 1960 Ohm	SG000556	Omni

Version 1.1

India
HGS (India) Ltd
Tel : +91-11-46066604
Website : www.hgsindia.com

The Netherlands
HGS Products B.V.
Tel : +31 708200820
Website : www.hgsproducts.nl