



HGS (INDIA) LIMITED



Resistivity Cable



158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA
Tel: +91 (0124) 4681800
Email: sales@hgsindia.com




HGS (INDIA) LIMITED



SCHEMATIC

Resistivity Cable

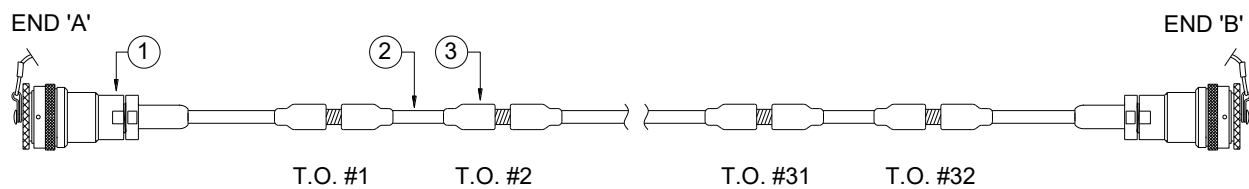

| | | |
|--------|--|---------|
| 3 | STEEL TUBE T.O. MOULDED FOR WIDE CLIP | 32 Nos. |
| 2 | 36 CONDUCTOR RESISTIVITY CABLE, YELLOW | As Req. |
| 1 | HGS-32 PIN M CONN. ASSY. | 02 Nos. |
| S. NO. | DESCRIPTION | QTY |

158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA

Tel: +91 (0124) 4681800

Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SPECIFICATIONS

Resistivity Cable

- Wide range of customer specified resistivity cables.
- Preferred for groundwater & mineral exploration.
- Six copper and one steel wire for conductors.
- Uses patented stainless steel 20mm waterproof takeouts.
- DC resistance < 290 ohms / km @ 20 C.
- Maximum OD: 8.0 mm.
- Break Strength > 90 kgf.
- Cable made as per customized requirements.
- Enough flexibility and strength for use in mobile field operations and frequent handling, transportation in form of coil etc.
- Excellent performance in rugged field conditions.
- Operating Temperature Range: -20°C to +70°C.

Version 1.2